


## **TANK SPECIFICATIONS**

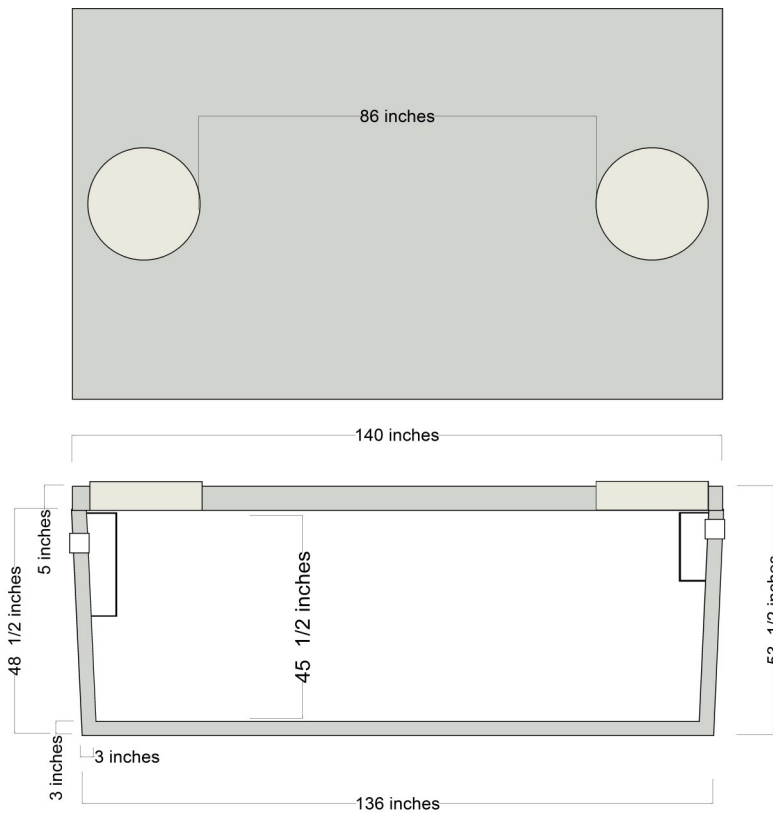

ALL ACCESS OPENINGS ARE  
24" I.D.

ALL BAFFLES HAVE A MINIMUM  
1" AIR SPACE BETWEEN COVER  
AND TOP OF BAFFLE

**REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.**

### **CAPACITY:**

1550 GALLONS

### **DIMENSIONS:**

LENGTH = 140" AT TOP,  
136" AT BOTTOM

WIDTH = 84" AT TOP,  
80" AT BOTTOM

OVERALL HEIGHT = 58"

DEPTH BELOW INLET = 42"

DEPTH BELOW OUTLET = 39"

### **INLET AND OUTLET BAFFLES:**

POLYETHELENE w/STAINLESS  
STEEL CONNECTORS

#### **INLET BAFFLE:**

14.5" (8" ABOVE LIQUID LEVEL,  
6.5" BELOW LIQUID LEVEL)  
18%

#### **OUTLET BAFFLE:**

22" (7.5" ABOVE LIQUID LEVEL,  
14.5" BELOW LIQUID LEVEL)  
40%

### **LIQUID CAPACITY:**

43.06 GAL PER INCH

36" LIQUID DEPTH

## **MODEL: DARWIN 1550**

SEPTIC TANK/HOLDING TANK  
1959 GALLONS  
TANK WEIGHT 12,136 LBS

*Precast  
Systems  
Inc.*

PO Box 56, Darwin MN 55324  
320-693-8440 888-693-8440