


TANK SPECIFICATIONS

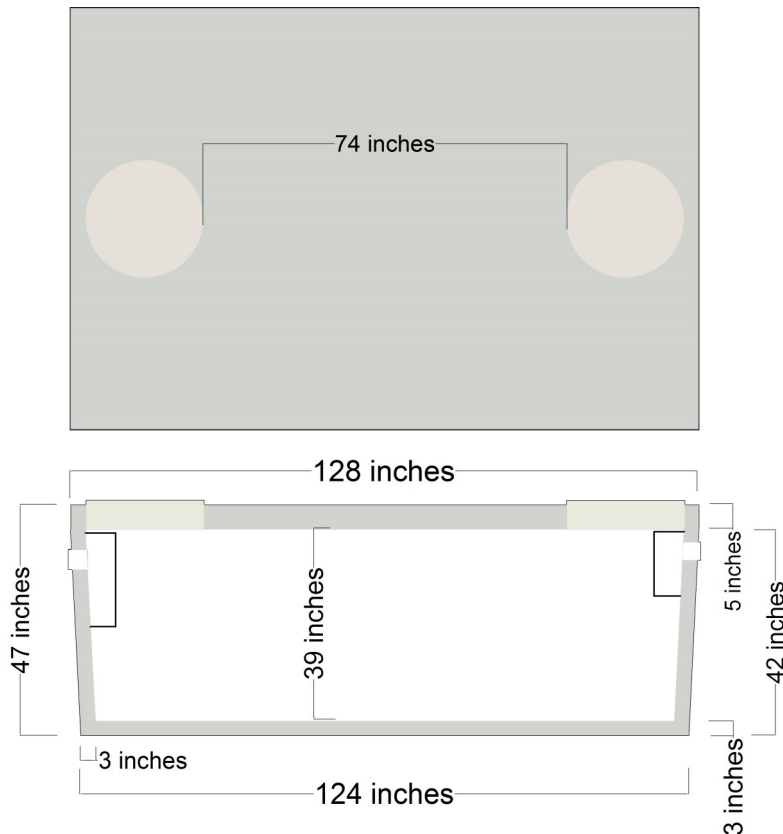

ALL ACCESS OPENINGS
ARE 24" I.D.

ALL BAFFLES HAVE A MINIMUM 1"
AIR SPACE BETWEEN COVER AND
TOP OF BAFFLE

CAPACITY:

1250 GALLONS

DIMENSIONS:

LENGTH = 128" AT TOP,
124" AT BOTTOM

WIDTH = 86" AT TOP,
82" AT BOTTOM

OVERALL HEIGHT = 52"

DEPTH BELOW INLET = 36"

DEPTH BELOW OUTLET = 34"

INLET AND OUTLET

BAFFLES:

POLYETHELENE w/STAINLESS
STEEL CONNECTORS

INLET BAFFLE:

13" (7" ABOVE LIQUID LEVEL,
6" BELOW LIQUID LEVEL)
19%

OUTLET BAFFLE:

19" (6 5/8" ABOVE LIQUID LEVEL,
12 3/8" BELOW LIQUID LEVEL)
40%

LIQUID CAPACITY:

41.67 GAL PER INCH

31" LIQUID DEPTH

REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.

MODEL: DARWIN 1250

SEPTIC TANK/HOLDING TANK
1625 GALLONS

TANK WEIGHT 11,142 LBS

Precast
Systems
Inc.

PO Box 56, Darwin MN 55324
320-693-8440 888-693-8440